



COMPACT HANDLING SOLUTIONS







MT625: simple, efficient and



MANITOU A GLOBAL NETWORK

- 1 400 points of sale... present in over 120 countries
- Over 2 000 specialist technicians
- A spare parts distribution centre of 34 000 m²
- A unique range of handling solutions
 - Telescopic handlers
 - Masted forklifts trucks
 - Electrical and diesel aerial access platforms
 - Truck mounted forklifts
 - Industrial and semi industrial forklifts
 - Warehouse equipment...



compact



MANITOU YOUR HANDLING PARTNER

From one country to the next, residential, commercial and industrial building sites have become more complex. You now have to work on sites which are becoming ever more confined and meet increasingly strict specifications in terms of cost and deadlines while remaining vigilant with regard to working conditions and the safety of your operators.

A global group

The MANITOU Group, **the global benchmark in handling solutions**, designs, assembles and distributes handling solutions in all sectors of activity: industry, construction and agriculture. Capitalising on over 50 year's experience, MANITOU is constantly innovating and guarantees quality products and services, always tailored to reflect the development of your activity.

Products that meet your needs

The **MT 625** all-terrain telehandler has **dimensions which are more than compact**. It enables you to carry out all your handling work: placing pallets on the first floor of a building, bulk loading or unloading from storage area or on site. Underground car parks and low headroom buildings on congested sites, you will appreciate all the qualities of this machine.

Your handling partner

More than a compact truck, MANITOU offers **a simple and efficient solution** which will **save you time**: intuitive when you're getting started through the Joystick Switch & Move system (exclusive to MANITOU), startup in only 10 seconds and functional dashboard.

In choosing MANITOU, you can count on a quality forklift. You will also benefit from the full range of services offered by your dealer: customer service, care and maintenance contracts, on-site service visits, bespoke hire and finance solutions.

With MANITOU, you can rest assured that you are working with a specialized, reliable and dedicated partner!



COMPACT MACHINE

MANOEUVRABILITY and optimised **DIMENSIONS**



MT 625

OPTIMISED DIMENSIONS

Designed with construction and renovation in mind, the MT 625 has exceptional characteristics in terms of compactness when compared with other telehandlers.

With a **width and height less than 2 m** ($1.81 \times 1.92 \text{ m}$), the MT 625 moves easily in restricted spaces (in materials storage areas, on urban or confined sites, under low headroom entrances and underground car parks).



MANOEUVRABILITY

The manoeuvrability remains your main advantage !

The MT 625 operates in places which would be inaccessible to other handling equipment thanks to the **4 wheel drive and all wheel steering**. One lever selects the various steering modes simply:

- 4-wheel steering for tight turning circles in confined spaces.
- Crab steering for side approaches and awkward clearances.
- 2 front wheel steering for driving on the road

1.81 m x 1.92 m : (width x height)

more than compact dimensions

33 CM ground clearance, for all terrain applications



EFFICIENCY AND SIMPLICITY

PERFORMANCE and FLEXIBILITY

75 hp engine

Your MT 625 is equipped with a 75 horepower **KUBOTA engine 4x4. 3.3 I cylinder** that meets the Interim the interim Stage IIIB and Tier 4 final guidelines.



Permanent 4 wheel drive

Two speed hydrostatic transmission

A flexible precise two speed transmission offering smooth gear changes with no torque drop-off via the simple press of a button on the JSM[®].



More **REACTIVITY** and **FLEXIBILITY**

- The hydrostatic transmission provides flexible and progressive control for positioning a load with more accuracy and safety. This system adapts the performance of your machine to the operators requirements.
- Using the inching function, you can adjust the speed of travel of the truck independently of the engine speed. Perfect for tricky operations!
- To adapt your speed to the working conditions and optimise fuel consumption, a +/- switch on the dashboard allows you to select either on-site speed (7 kph) or road speed (25 kph).

MT 625

simplified MAINTENANCE

- All the maintenance is simplified : full access to all filters and components
- The large opening of the engine bonnet on the side of the machine provides easy access to the gauges, air filter and diesel filter...



Only 10 seconds to start working:

- No step to access the cab
- Driving seat quick to adjust
- Engine start and intuitive operation using the JSM[®] control lever



DRIVING COMFORT

COMFORT and **ERGONOMICS** at work

The whole driving position offers you a working space which has been ergonomically designed for maximum comfort. All the main controls are easily accessible. A selection of standard and optional equipments are available for enhanced comfort and safety of the MT telescopic handlers to satisfy **your daily needs**.

A spacious cab offering you a full visibility

You can work in total safety and optimize your working conditions for greater efficiency and productivity.





Ergonomic dashboard and joystick

The dashboard groups all of the information you need in a logical sequence.

The JSM (Joystick Switch and Move) single lever allows you to operate in complete safety carrying out every movement with one hand:

- speed changing on the JSM,
- raise and lower the boom,
- extend and retract the boom,
- lift and tilt bucket,
- hydraulicaully move the attachments, and also forward and reverse direction control.

You always keep one hand on the steering wheel to totally control your telescopic handler.

STANDARDS AND OPTIONAL EQUIPMENT	MT 625 H	MT 625 H
Driver's compartment		
Full cab with heating/demisting (ROPS/FOPS 1)	•	•
Air conditioning	-	0
Adjustable seat with waterproof covering	•	•
Cloth-covered adjustable seat	-	0
JSM®	•	•
Adjustable steering column	-	•
Roof light	-	•
Internal rear-view mirror	0	0
Electric rear tailgate de-icing	-	0
Windscreen sun visor kit and roof screen	0	•
Front windscreen wash/wipe - Rear screen wiper	•	•
Roof wiper	-	•
Car radio predisposition	-	•
Car radio tuner or CD/MP3	-	0
Speed changing on the JSM	•	•
Safety items		
Front and rear wheel alignment indicator	•	•
Aggravating movement cut-off	•	•
Lighting: road lighting, brake lights, flashing direction indicators, fog light, reversing light	•	•
Front and rear working light	0	•
Windscreen mesh	0	0
Rear-view mirror	0	0
Others		
Hydraulic service at the boom head	0	•
Hydraulic locking of attachments	0	0

Standard O Option - Not available

VERSATILITY

Your MANITOU telescopic forklift, a multi purpose machine...

Your productivity and safety are linked to your choice of attachments. Developing our machines permit us to find the attachment that will bring you the best efficiency, but still respecting standards. Choosing a MANITOU attachment is the best choice for your MT!







The universal MANITOU attachment system is easy and simple to use. You can attach / detach your accessories without difficulty.

... for a multitude of applications

MANITOU attachments for all your on-site needs, optimizing your working time and your forklift's productivity:







APPLICATIONS













APPLICATIONS



MANITOU SERVICES



Tailor-made finance to make the best use of your funds

• Main d'oeuvre

Déplacement

You can plan the purchase of your forklift with peace of mind by using MANITOU^{*} financing opportunities.

You will have simple solutions adapted to your needs and seasonal requirements. If you want to make a rapid investment, consider asking us for a personalised proposal to take your situation into account.

* MANITOU Finance solutions are available in certain countries.

MANITOU maintenance contract

2 levels of maintenance adapted to your needs. You are sure of:

- equipment always in good working condition
- a reduction of repair costs as a result of regular servicing
- authentic standardised services

Extension of warranty



With **MANIPLUS**, you can take out an extension of warranty up to 60 months.

EASY MANAGER

A simple and flexible system for fleet management (with or without geolocation) to provide optimum service from your machines. EASY MANAGER gives you:

- real-time materials management
- simple and easy way of managing your machinery activity and maintenance
- maximise your asset and safeguard your equipment

MANITOU spare parts

Utilising genuine MANITOU spare parts is sure to prolong the best performance capability of your machine. Your MANITOU dealer has access to a stock of 70,000 part numbers, available in 24 hours in Europe (48 hours outside Europe).









SUSTAINABLE SOLUTIONS

MT 625



TOGETHER, LET'S REDUCE OUR CARBON FOOTPRINT

The material handling sector has not yet got a normalised cycle to measure the trucks' energy consumption. MANITOU Group clearly shows its commitment to transparency by establishing an internal protocol, accessible to all, that can reveal its own measures of consumption (I/h) and CO2 emissions (kg/h). To provide the highest reliability, the data is checked and approved by an independent body, UTAC* specialized in the registration of vehicles and equipment.








	MT 625 H
Lifting	
Max. capacity	2500 kg
Max. lifting height	5.85 m
Break-out force with bucket (ISO 8313)	3427 daN
Unladen time	
Lifting	8.0 secs
Lowering	5.4 secs
Extension	5.6 secs
Retraction	4.3 secs
Crowd	3.5 secs
Dump	3.6 secs
Tyres	12-16.5 12PR SKS CL TUBELESS
Braking	
Service brake	Oil immersed multi-disc braking
Parking brake	Automatic Negative Handbrake
-	-
Engine	KUBOTA STAGE III B / FINAL TIER 4
Type Cubic conscitu	V3307-DI-T-E4B
Cubic capacity	4 cylinders - 3331 cm ³
Power	75 HP/55.4 kW
Max. torque	265 Nm
Injection	direct
Cooling	water
Laden drawbar pull	3550 daN
Transmission	hydrostatic
Reversing shift	electro-hydraulic
Number of gears (forward/reverse)	2/2
Max. travel speed	25 kph
(may vary according to applicable regulations)	•
Steering mode	4 wheel steer - 3 Steering Modes
Controls	JSM® Joystick multi - function Load Limiter Cut off system - EN15000 Norm
Hydraulics	
Pump	gear type with priority valve 90 l/min – 235 bar
Capacities	
Cooling system	12
Oil engine	11.2
Hydraulic oil	115
Fuel	63 I
Unladen weight (with forks)	4800 kg
Dimensions	
C. Front wheel centre to carriage	0.99 m
B. Wheelbase	2.30 m
I. Rear wheel centre to rear face	0.60 m
D. Overall length to carriage	3.90 m
G1. Ground clearance	0.33 m
J. Overall width of cab	0.79 m
F. Inside tyre width	1.49 m
W. Overall width	1.45 m 1.81 m
U1. Overall height	1.01 m 1.92 m
5	
Standard forks (length x width x thickness)	1200 x 125 x 45 mm
Turning radius (over tyres)	3.31 m
Noise and vibration	
Noise at driving position (LpA)	76 dB
Environmental noise (LwA)	104 dB
Vibration to whole hand/arm	<2.50 m/s ²

Rough terrain load chart standard EN1459 B

Machine on tyres with forks

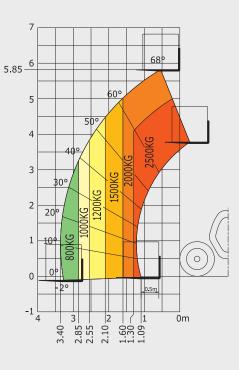







This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information ony. MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes

FT026EN_C_1014_MT625.indd







Head office: B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 83 36 88 www.MANITOU.com

